





AIR NOZZLE SILVENT 705 A

Item number: 07050129002, 07050229002

SILVENT 705 A: adjustable variation of 705. Allows up to 30° blowing angle adjustment from the centerline. Time required for installation and fine tuning of the blowing angle is decreased considerably. Same performance as 705.

Technical data

Replace open pipe Ø (mm)	10
Blowing force (N)	15.0
Air consumption (Nm³/h)	95
Sound level (dB(A))	92
Nozzle technology	Slot
Material (nozzle)	1.4305 (303)
Connection	G 1/2"
Connection type	Female
Weight (g)	430
Max temp (°C)	400
Max op. pressure (MPa)	1.0

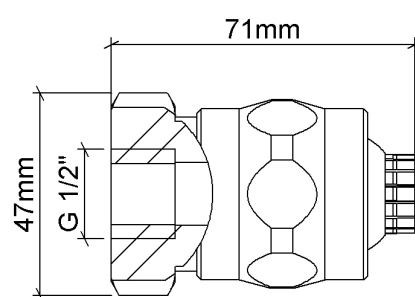

Benefits when replacing an open pipe

Benefits when replacing an open pipe		
Replace open pipe Ø (mm)	10	
Noise reduction	20 [dB(A)]	75%
Energy savings	90 [Nm³/h]	49%

Material specification: EN 1.4305

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	6.3	12.1	18.3	24.0	30.0
Air consumption (Nm³/h)	49.8	82.0	114.0	149.0	180.0
Sound level (dB(A))	85.6	90.6	95.0	97.6	100.0

Blowing coverage (mm)

