


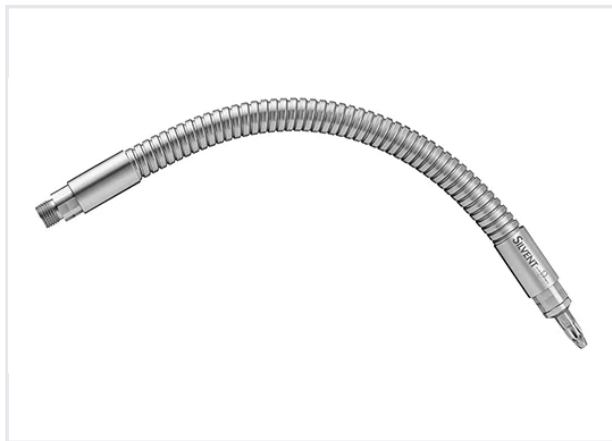


AIR NOZZLE SILVENT X02-300

Item number: 0X020369628, 0X020469628

SILVENT X02-200 - X02-500: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/4" male connection thread. Otherwise, the same performance as X02.

Technical data

Replace open pipe Ø (mm)	6
Blowing force (N)	6.5
Air consumption (Nm³/h)	34
Sound level (dB(A))	86
Nozzle technology	Multi-Laval
Material (nozzle)	1.4404 (316L)
Connection	G 1/4"
Connection type	Male
Weight (g)	234
Max temp (°C)	260
Max op. pressure (MPa)	1.0

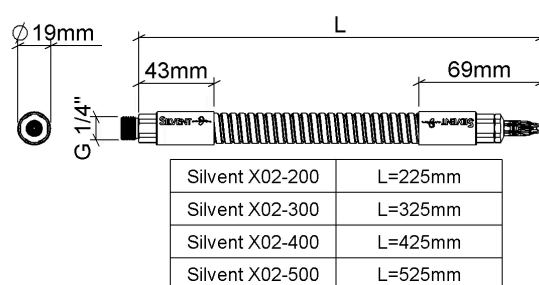

Benefits when replacing an open pipe

Replace open pipe Ø (mm)	6	
Noise reduction [dB(A)]	16 [dB(A)]	67%
Energy savings	33 [Nm³/h]	49%

Material specification: EN 1.4301, PTFE, CU, EN 1.4404

Technical specifications

See basic information about the technical data. [Read more](#)

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	2.6	5.2	7.7	10.3	12.8
Air consumption (Nm³/h)	15.2	28.6	40.9	53.9	66.8
Sound level (dB(A))	79.2	84.3	88.0	89.8	90.5

Blowing coverage (mm)

